

---

**Question 8: What level of PM<sub>2.5</sub> particulate removal do you expect (or have achieved) with flue gas fines separation and removal equipment such as third-stage separators, fourth-stage separators, electrostatic precipitators, or wet gas scrubbers?**

WARDINSKY (ConocoPhillips)

We have not benchmarked particulate removal technologies within our system for PM 2.5 removal. This data is difficult to obtain because many stack tests do not analyze the captured particulate matter for particle size distribution or PSD. To calculate the particle size or grade removal efficiency, the PM mass rate and PSD need to be obtained upstream of the removal equipment, as well as downstream. It is important to understand the mechanism of catalyst attrition in FCC units when evaluating PM removal technologies. We have been able to decrease PM emissions by up to 0.2 lbs/1000 lbs of coke burned by changing catalysts. Scanning electron microscopy, imaging of fresh catalyst, and e-cat can be useful tools in understanding catalyst attrition mechanisms. In addition to installing equipment for PM removal, it may also be necessary to modify the regenerator and regenerator internals. Additional regenerator vessels height to reduce catalyst entrainment, replacing regenerator cyclones, and replacing the air distributor are all steps that ConocoPhillips has taken to reduce PM emissions.

Cyclonic separators have limited PM removal capabilities, as illustrated in this table showing the PM removal grade efficiencies from the outlet of a third-stage separator system. As you can see, this data is consistent with TSS performance where you would expect about a 50% capture in the 2 to 3 micron range. For a scrubber system or an ESP, you would expect considerably higher grade capture efficiencies.



Cyclonic separators have limited PM removal capabilities as illustrated in the following table showing PM removal grade efficiencies from the outlet of a Third Stage Separator (TSS) system.

Particle Size Range (microns)	TSS Capture Efficiency
0-1	32%
1-2.5	50%
2.5-5	92%
>5	100%
All Sizes	64%

This data is consistent with TSS performance where you would expect 50% capture efficiency in the 2-3  $\mu\text{m}$  range. For a wet gas scrubber the capture efficiency should be in the range of 75-85% for the 2-3  $\mu\text{m}$  range. An ESP should get even better capture efficiency of 80-90% in the 2-3  $\mu\text{m}$  range.



FCC Q&A

This table illustrates some of the PM removal capabilities of different technologies. We have different combinations and permutations of technologies within our system. These are reported in terms of pounds of particulate matter per thousand pounds of coke burned or a MAC2-type number. ConocoPhillips is going to be installing a wet gas scrubber with a wet ESP at one of our sites to reduce the PM and SO<sub>2</sub> emissions in order to meet local PM emissions limits. I think this table is interesting because it shows some of the effects of having a third-stage separator up front of a dedicated PM removal technology, as well as some of the combinations we see within our system.




Example	PM Removal Technology	PM Emissions*** (lb PM / 1000 lbs)
1	TSS (Large Cyclone Type) + FSS (Cyclone Type)*	0.50
2	TSS (Large Cyclone Type) + FSS (Cyclone Type)* + ESP (with NH <sub>3</sub> Injection)	0.11
3	ESP with NH <sub>3</sub> Injection	0.22
4	WGS (Low ΔP Type)	0.30
5	ESP + WGS (Low ΔP Type)	0.22
6	TSS (Large Cyclone Type) + FSS (Cyclone Type)* + WGS (Low ΔP Type)	0.30
7	WGS (High ΔP Type)	0.25
8	TSS (Large Cyclone Type) + FSS (Cyclone Type)* + WGS (Low ΔP Type) + Wet ESP	0.15**
Notes	*FSS treats TSS underflow **Projected *** Not including sulfates	



FCC Q&A

## HEATER (BASF Catalysts)

It is difficult to achieve greater than 50% PM<sub>2.5</sub> reduction with conventional third- and fourth-stage separation systems. However, most ceramic and centered-metal filters have shown good success in significantly increasing capture efficiency. Flue gas scrubbers will often achieve greater than 95% reduction over a four-year run. BASF Catalyst believes that this is an area requiring further development and they have devoted significant resources in that direction. ESP particulate removal was covered in an excellent paper by Shiller and Stahl from the 2006 FCC Seminar. Their data shows an 85% to 90% reduction of the PM<sub>2.5</sub> with a well-designed and operated ESP.

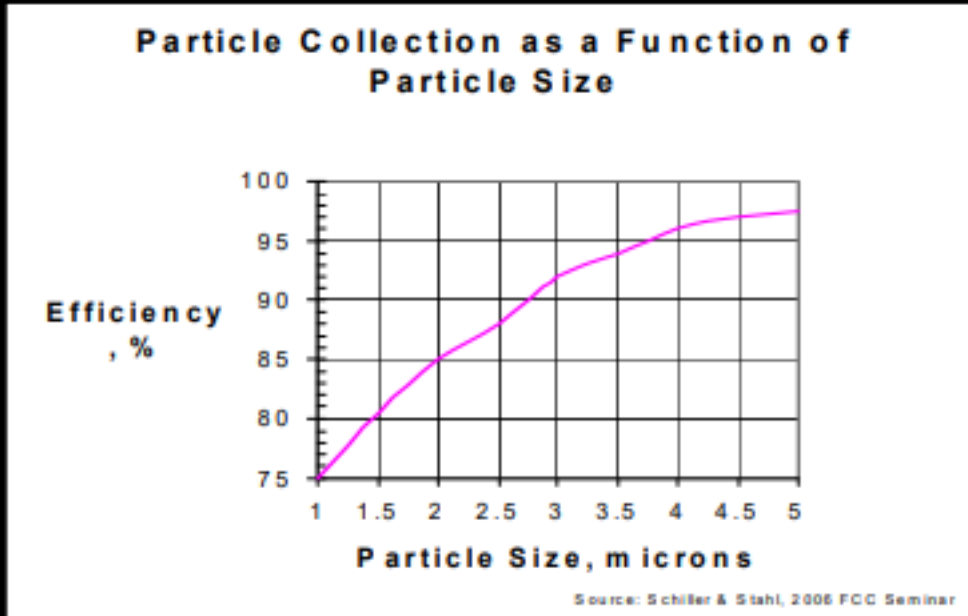

YE-MON CHEN (Shell Oil Company)

I have a comment on the separation efficiency on the third-stage separator. In the past, in the third-stage separator, the cutpoint—meaning the 50% capture—is around the 2.5. The new generation of the third-stage separator technology can achieve a cutpoint of about 2 microns.

Print as PDF:

Submitter

[Operator](#)

---